


Art. no. 50233000 | 50233010 | 50233200 | 50233210




DIMMABLE WITH WALL DIMMER


Combine the LED driver dimmable wrinkle free with two meter connection wire with the Yphix wall dimmer built-in 1-10V max. 40A and easily dim your panels. You can connect multiple panels with one wall dimmer.

PRODUCT COMBINATIE

- Wall dimmer flush-mounted 1-10V max. 40A Art. no. 50178550
- Driver
 - LED Driver 1-10V dimmable ripple-free with 2 m power cord Art. no. 50239032
 - LED Driver ripple-free with 2 m power cord Art. no. 50239022
- Optional product
 - LED Panel mounting frame 60x60 Pro and Excellent Art. no. 50239400
 - LED Panel mounting frame 120x30 Pro and Excellent Art. no. 50239401
 - LED Panel mounting kit Art. no. 50239900
- LED Panel Pro 40W Art. no. 50233000 | 50233010 | 50233200 | 50233210

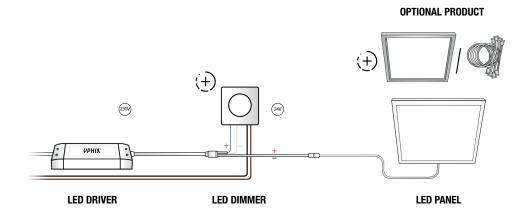





Art. no. 50233000 | 50233010 | 50233200 | 50233210




DIMMABLE WITH WALL DIMMER (WIELAND)


Do you use a Wieland connection and do you want to dim with a wall dimmer? We have an easy solution when you choose our Wieland combination for a fast and easy connection and beautiful dimming result.

PRODUCT COMBINATIE


- Power cord optional
 - Wieland power cord GST18 3-pin (female), 3 metres Art. no. 50039200
- Driver
 - LED Driver dimmable ripple-free (Wieland connection) Art. no. 50239030
 - LED Driver ripple-free (Wieland connection) Art. no. 50239020
- Wall dimmer flush-mounted 1-10V max. 40A Art. no. 50178550
- Optional product
 - LED Panel mounting frame 60x60 Pro and Excellent Art. no. 50239400
 - LED Panel mounting frame 120x30 Pro and Excellent Art. no. 50239401
 - LED Panel mounting kit Art. no. 50239900
- Wieland extension
 - Wieland T-splitter with 1 male and 2 female GST18 3-pin connectors Art. no. 50039203
 - Wieland coupling cable GST18 3 pins (female and male connector) Art. no. 50039201
 - Wieland power cord GST18 3-pin (male), 1.5 metres Art. no. 50039202
- LED Panel Pro 40W Art. no. 50233000 | 50233010 | 50233200 | 50233210

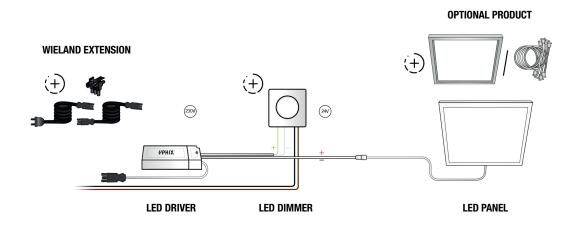





Art. no. 50233000 | 50233010 | 50233200 | 50233210




DIMMABLE WITH ZIGBEE

If you choose a Zigbee LED driver 350-1400mA 50W with your panel, you can easily connect the panel with the app on your smartphone that you use for your smart lighting. You can also combine the Zigbee remote with our pulse switches and wall remotes, so it's also possible to control the light without smartphone. You need one driver per panel.

PRODUCT COMBINATIE

- Power cord optional
 - Power cord 2.5 metres Art. no. 50169260
- Zigbee LED driver 350-1400mA 50W Art. no. 50208702
- Remote
 - Wireless wall control Zigbee 1 zone* Art. no. 50208689
- Optional product
 - LED Panel mounting frame 60x60 Pro and Excellent Art. no. 50239400
 - LED Panel mounting frame 120x30 Pro and Excellent Art. no. 50239401
 - LED Panel mounting kit Art. no. 50239900
- LED Panel Pro 40W Art. no. 50233000 | 50233010 | 50233200 | 50233210


OPTIONAL PRODUCT

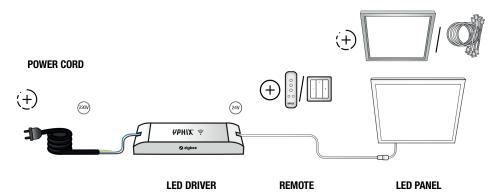

*OTHER OPTION

REMOTE				
1	Wireless wall control Zigbee 1 zone kinetic Art. no. 50208790	Wireless wall control Zigbee 4 zones Art. no. 50208691	7	Wireless wall control Friends of Hue Art. no. 50208697
2	Wireless wall control Zigbee 2 zones kinetic Art. no. 50208791	Wall dimmer Zigbee wireless Art. no. 50208692	8	Smart LED remote control white Art. no. 50208520
3	Wireless wall control Zigbee 2 zones Art. no. 50208690	Wireless wall control Friends of Hue kinetic Art. no. 50208795		





Art. no. 50233000 | 50233010 | 50233200 | 50233210



DIMMABLE WITH DALI

Are you using a Dali-system in your house? Then choose the Yphix LED driver Dali System and integrate the panels in your current Dali System without a problem.

PRODUCT COMBINATIE

- LED Driver Dali system Art. no. 50239040
- Optional product
 - LED Panel mounting frame 60x60 Pro and Excellent Art. no. 50239400
 - LED Panel mounting frame 120x30 Pro and Excellent Art. no. 50239401
 - LED Panel mounting kit Art. no. 50239900
- LED Panel Pro 40W Art. no. 50233000 | 50233010 | 50233200 | 50233210

