



4 - CEILING AND WALL LIGHTS










Range of lighting solutions for walls and ceilings with great attention to detail. Blind mounting ensures no screws are visible, and there's no ring holder in front of the lamp. Powder coating instead of lacquering ensures the colour will last and the fixtures are scratch-resistant. Wall lights are mostly suited for outside spaces too. Their light source is easily replaced. Our ceiling lights are perfect around the workspace, home, and public spaces.

YPHIX CEILING AND WALL LIGHTS QUALITY FEATURES:

- Blind mounting, so no visible screws
- No ring holder in front of the lamp
- Powder-coated fixtures instead of lacquered
- Available in white, black and aluminium colours
- Round and square single designs, square in double and carre
- Ceiling lights suitable for AR111 LED spots available too






Spot Palermo

SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Suitable for	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
 50114804	Surface-mounted spot Palermo aluminium square tiltable		90	90	95	IP20	Aluminium (brushed)				GU10/ GU5.3/ MR16 LED module				
 50114806	Surface-mounted spot Palermo aluminium square double tiltable		173	90	95	IP20	Aluminium (brushed)				GU10/ GU5.3/ MR16 LED module				
 50114810	Surface-mounted spot Palermo aluminium square carré tiltable		160	160	95	IP20	Aluminium (brushed)				GU10/ GU5.3/ MR16 LED module				
 50114824	Surface-mounted spot Palermo white square tiltable		90	90	95	IP20	White (RAL 9003)				GU10/ GU5.3/ MR16 LED module				
 50114826	Surface-mounted spot Palermo white square double tiltable		173	90	95	IP20	White (RAL 9003)				GU10/ GU5.3/ MR16 LED module				
 50114830	Surface-mounted spot Palermo white square carré tiltable		160	160	95	IP20	White (RAL 9003)				GU10/ GU5.3/ MR16 LED module				
 50114854	Surface-mounted spot Palermo black square tiltable		90	90	95	IP20	Black (RAL 9005)				GU10/ GU5.3/ MR16 LED module				
 50114856	Surface-mounted spot Palermo black square double tiltable		173	90	95	IP20	Black (RAL 9005)				GU10/ GU5.3/ MR16 LED module				
 50114860	Surface-mounted spot Palermo black square carré tiltable		160	160	95	IP20	Black (RAL 9005)				GU10/ GU5.3/ MR16 LED module				



Spot Roma

















SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Suitable for	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
 50114802	Surface-mounted spot Roma aluminium round tiltable	Ø90			95	IP20	Aluminium (brushed)				GU10/ GU5.3/ MR16 LED module				
 50114822	Surface-mounted spot Roma white round tiltable	Ø90			95	IP20	White (RAL 9003)				GU10/ GU5.3/ MR16 LED module				
 50114852	Surface-mounted spot Roma black round tiltable	Ø90			95	IP20	Black (RAL 9005)				GU10/ GU5.3/ MR16 LED module				




Spot Palermo & Roma AR111







SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Suitable for	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
 50114825	Surface-mounted spot Palermo AR111 white square tiltable		160	160	145	IP20	White (RAL 9003)				AR111				
 50114827	Surface-mounted spot Palermo AR111 black square tiltable		160	160	145	IP20	Black (RAL 9005)				AR111				
 50114823	Surface-mounted spot Roma AR111 white round tiltable	Ø160			145	IP20	White (RAL 9003)				AR111				
 50114828	Surface-mounted spot Roma AR111 black round tiltable	Ø160			145	IP20	Black (RAL 9005)				AR111				

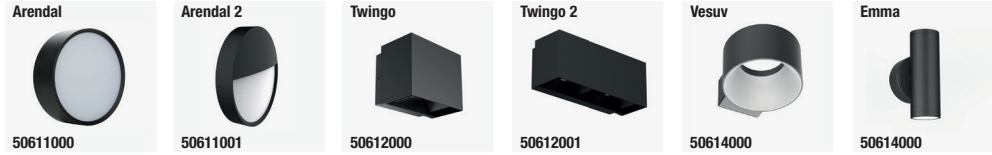



SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Input Voltage	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
	50241000 LED wall light Akerson black down 3W 3000K IP54		140	140	50	IP54	Black	No	30000	3	220-240V AC	220	3000K	>80	25°
	50241001 LED wall light Akerson black up and down 6W 3000K IP54		140	140	50	IP54	Black	No	30000	6	220-240V AC	530	3000K	>80	25°
	50241010 Wall light Asele black E27 IP54 milky white glass		285	149	97	IP54	Black				220-240V AC				
	50241020 Wall light Kubbe black down GU10 IP44		80	68	93	IP44	Black				220-240V AC				
	50241021 Wall light Kubbe 2 black up and down GU10 IP44		150	68	93	IP44	Black				220-240V AC				
	50241022 Wall light Kubbe 3 black up and down GU9 IP54		80	102	114	IP54	Black				220-240V AC				
	50241023 Wall light Kubbe 4 black up and down GU9 IP54		80	102	114	IP54	Black				220-240V AC				
	50241030 LED ceiling light Borg black 11W 3000K IP65		200	200	54	IP65	Black	No	30000	11	220-240V AC	870	3000K	>80	115°
	50241040 LED ceiling light Hillsand black 6W 3000K IP65	Ø150			55	IP65	Black	No	30000	6	220-240V AC	540	3000K	>80	110°
	50241050 LED wall light Bjorka black 6W 3000K IP54		200	160	45	IP54	Black	No	30000	6	220-240V AC	630	3000K	>80	115°
	50241051 LED wall light Bjorka black with motion sensor 6W 3000K IP54		200	160	45	IP54	Black	No	30000	6	220-240V AC	630	3000K	>80	115°
	50241060 LED wall light Alesund black 9W 3000K IP54 milky white glass	Ø80	245		131	IP54	Black	No	30000	9	220-240V AC	580	3000K	>80	270°
	50242000 LED wall light Belvik black elongated 3W 3000K IP65		238	105	69	IP65	Black	No	30000	3	220-240V AC	280	3000K	>80	80°
	50242002 LED wall light Belvik black round 3W 3000K IP54	Ø160			31	IP54	Black	No	30000	3	220-240V AC	300	3000K	>80	75°
	50242010 LED wall light Mala black elongated 3W 3000K IP54		195	52	58	IP54	Black	No	30000	3	220-240V AC	146	3000K	>80	60°
	50242011 LED wall light Mala black round 3W 3000K IP54	Ø80			60	IP54	Black	No	30000	3	220-240V AC	146	3000K	>80	50°





SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Input Voltage	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
 50611000	LED wall & ceiling light Arendal 1 black 12W 3000K IP65	Ø250			58	IP65	Black (RAL 9005)	No	30000	12	220-240V AC	1250	3000K	>80	110°
 50611001	LED wall & ceiling light Arendal 2 black 12W 3000K IP65	Ø250			74	IP65	Black (RAL 9005)	No	30000	12	220-240V AC	1100	3000K	>80	110°
 50612000	LED wall light Twingo black 10W 3000K adjustable beam angle IP65		120	97	100	IP65	Black (RAL 9005)	No	30000	10	220-240V AC	900	3000K	>80	15°-60°
 50612001	LED wall light Twingo 2 black 18W 3000K adjustable beam angle IP65		242	97	100	IP65	Black (RAL 9005)	No	30000	18	220-240V AC	1350	3000K	>80	15°-60°
 50613000	LED wall light Vesuv black 8W 3000K IP65	Ø140	170	59		IP65	Black (RAL 9005)	No	30000	8	220-240V AC	655	3000K	>80	120°
 50614000	LED wall light Emma black 10W 3000K IP65	Ø60	105		170	IP65	Black (RAL 9005)	No	30000	10	220-240V AC	900	3000K	>80	60°



SKU	Product name	Diameter (mm)	Length (mm)	Width (mm)	Height (mm)	IP value	Colour	Dim-mable	Lifetime (hrs)	Wattage (W)	Input Voltage	Lumen (Lm)	Kelvin value (K)	CRI	Beam angle
 50413508	LED ceiling light white round 9W 3000K dimmable	Ø117			39	IP44	White (RAL 9003)	Yes	30000	9	220-240V AC	530	3000K	>80	120°
 50413511	LED ceiling light white round 11W 3000K dimmable	Ø180			39	IP44	White (RAL 9003)	Yes	30000	11	220-240V AC	820	3000K	>80	120°
 50413515	LED ceiling light white round 15W 3000K dimmable	Ø240			39	IP44	White (RAL 9003)	Yes	30000	15	220-240V AC	1010	3000K	>80	120°
 50413530	LED ceiling light white round 30W 3000K dimmable	Ø300			39	IP44	White (RAL 9003)	Yes	30000	30	220-240V AC	2240	3000K	>80	120°

